

# Ceramic Low Pass Filter

50Ω DC to 1800 MHz

# LFCN-1800+ LFCN-1800



## Maximum Ratings



Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C

\* Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4

## Outline Drawing



### PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

## Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.126	.063	.037	.020	.032	.009	.169	.087	.024	.122	.024	.087	.012	.071	grams
3.20	1.60	0.94	0.51	0.81	0.23	4.29	2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

## Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

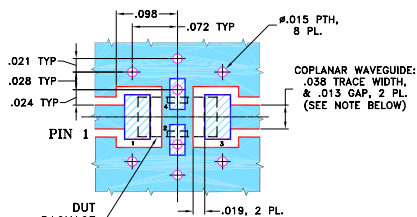

- NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- excellent power handling, 10W
- small size
- 7 sections
- temperature stable
- protected by U.S Patent 6,943,646

## Applications


- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

## Electrical Specifications<sup>1</sup> (T<sub>AMB</sub> = 25°C)


PASSBAND (MHz)	f <sub>co</sub> , MHz Nom.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
		F 20	30	FR 20	Stopband	Passband	
(loss < 1.0 dB)	(loss 3 dB)	Min.	Typ.	Typ.	Typ.	Typ.	
Max.	Typ.						
DC-1800	2125	2425	2500-7200	8600	20	1.2	7

1. For applications requiring DC voltage to be applied to the Input or output, use LFCN-1800D+ (DC Resistance to ground is 100 Mohms min.)

## typical frequency response





## electrical schematic



## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100.00	0.07	1.01
500.00	0.21	1.11
1000.00	0.41	1.24
1500.00	0.62	1.24
1850.00	0.86	1.06
1875.00	0.90	1.07
2000.00	1.21	1.22
2125.00	2.29	1.88
2450.00	32.51	15.53
2500.00	33.42	17.05
4000.00	38.61	42.38
6000.00	37.95	34.07
7200.00	32.93	24.48
8800.00	20.55	18.90
9000.00	19.80	17.39

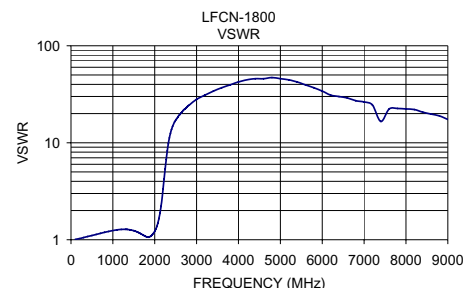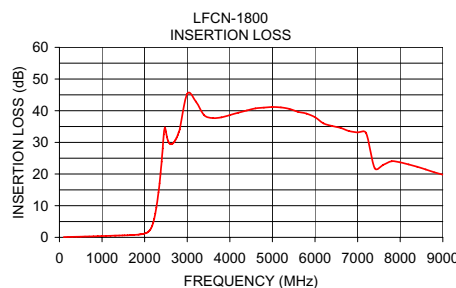

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. F  
M121640  
LFCN-1800  
ED-11960/4  
AD/CP/AM  
090218