


Surface Mount Frequency Mixer

MBA-12+ MBA-12

Level 7 (LO Power +7 dBm) 800 to 2500 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,7,8,9
ISOLATE (DO NOT USE)	2,6

Outline Drawing

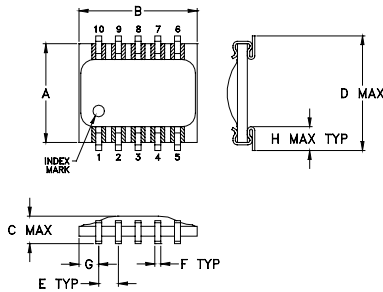

PCB Land Pattern




Suggested Layout.
Tolerance to be within ±0.02
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	
.250	.300	.095	.290	.050	.015	.050	.060	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52	
J	K	L	M	N	P	Q	R	wt
.030	.080	.300	.100	.020	.015	.070	.014	grams
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-117 Suggested PCB Layout (PL-065)

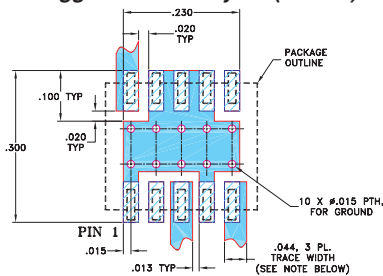

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent temperature stability
- excellent performance repeatability
- leads with strain relief
- very low cost
- ultra low height, 0.07"
- aqueous washable
- protected by US Patent 5,534,830

Applications

- cellular
- PCN/PCS/wideband CDMA
- WLAN
- satellite communication
- ISM band
- PCMCIA

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	\bar{X}	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
800-2500	DC-500	7.5	0.1	9.0	30	20	15	8	12

1 dB COMP.: +1 dBm typ.

CASE STYLE: SM2

PRICE: \$5.95 ea. QTY (10-49)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
800.00	830.00	7.80	23.60	16.70	3.50	3.50
900.00	930.00	7.17	23.00	17.00	3.64	2.84
936.67	966.67	7.04	23.20	17.10	3.95	2.58
1000.00	1030.00	7.11	23.00	17.00	3.95	2.55
1100.00	1130.00	6.86	23.60	16.10	3.79	2.32
1180.00	1210.00	6.38	23.90	14.70	3.64	2.12
1250.00	1280.00	6.51	24.30	13.80	3.50	1.92
1400.00	1430.00	6.39	24.70	12.10	2.92	1.63
1500.00	1530.00	6.61	25.80	11.30	2.61	1.61
1600.00	1630.00	6.84	26.20	11.10	2.25	1.55
1666.67	1696.67	6.71	26.40	10.90	2.10	1.47
1800.00	1830.00	6.43	28.50	10.50	2.35	1.39
1910.00	1940.00	6.48	29.30	11.00	2.46	1.43
2000.00	2030.00	6.46	32.50	11.90	2.43	1.51
2100.00	2130.00	6.64	39.30	12.60	2.52	1.56
2153.33	2183.33	7.19	40.30	12.60	2.76	1.56
2300.00	2330.00	7.87	49.10	13.50	3.21	1.69
2400.00	2430.00	7.74	36.30	14.20	2.72	1.85
2470.00	2500.00	7.92	30.20	14.80	2.49	1.97
2500.00	2530.00	8.15	28.70	14.80	2.46	2.04

Electrical Schematic

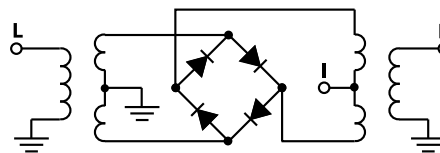

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M1115169
MBA-12
EE-7756/7
090128
Page 1 of 2

Performance Charts

