

Power Splitter/Combiner

2 Way-0° 50Ω 3700 to 4200 MHz

SCN-2-45+
SCN-2-45



CASE STYLE: FV1206-1
PRICE: \$ 2.50 ea. QTY (10-49)
\$ 0.99 ea. QTY (100)

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	4W* max.

*Derate linearly to 1.3W at 100°C ambient, power input as combiner is limited by rating of external 100Ω Resistor.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	4
GROUND	1,3,5
PORT 1-2	resistor external 100 OHMS


Outline Drawing

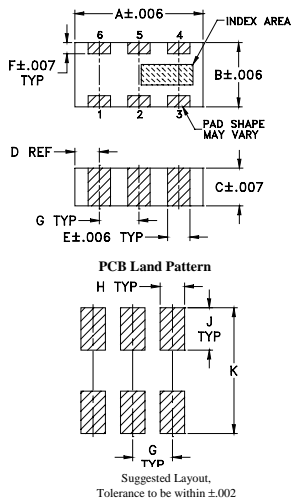

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.126	.063	.035	.024	.022	.011	
3.20	1.60	0.89	0.61	0.56	0.28	
G	H	J	K			wt
.039	.024	.042	.123			grams
0.99	0.61	1.07	3.12			.020

Demo Board MCL P/N: TB-252
Suggested PCB Layout (PL-129)

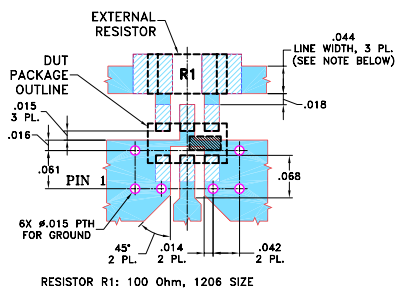

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- isolation resistor, external 100 ohms
- low insertion loss, 0.7 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- excellent phase unbalance, 1.5 deg. typ.
- high isolation, 22 dB typ.
- excellent power handling, 4W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around terminations for excellent solderability
- low cost
- patent pending

Applications




- maritime mobile

Electrical Specifications


FREQUENCY (MHz)	INSERTION LOSS (dB) ABOVE 3.0 dB		ISOLATION (dB)		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Max.	Typ.	Min.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
3700-4200	0.7	1.0	22	13	1.5	4.0	0.2	0.4	14	17
3800-4100	0.7	1.0	22	15	1.5	4.0	0.2	0.4	16	17

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	Return Loss (dB)		
	S-1	S-2				S	1	2
3700.00	3.55	3.37	0.18	16.04	1.57	17.81	22.02	28.10
3720.00	3.55	3.38	0.17	16.28	1.65	18.21	21.85	27.94
3740.00	3.54	3.39	0.15	16.49	1.66	18.58	21.83	27.36
3760.00	3.53	3.40	0.13	16.69	1.60	18.81	21.77	27.02
3780.00	3.53	3.41	0.12	16.91	1.46	18.96	21.52	26.95
3800.00	3.53	3.41	0.12	17.16	1.31	19.12	21.17	26.69
3864.00	3.54	3.38	0.16	17.92	1.09	19.67	20.59	25.75
3896.00	3.54	3.36	0.18	18.33	1.16	20.06	20.04	24.89
3960.00	3.54	3.34	0.19	19.05	1.26	20.35	19.56	23.33
4016.00	3.54	3.35	0.19	19.83	1.35	20.24	19.39	22.30
4044.00	3.54	3.35	0.19	20.24	1.35	20.20	19.35	21.98
4072.00	3.55	3.36	0.19	20.68	1.35	19.94	18.95	21.14
4100.00	3.55	3.36	0.19	21.14	1.38	19.60	18.59	20.57
4150.00	3.56	3.37	0.19	21.95	1.40	18.95	18.16	20.17
4200.00	3.58	3.38	0.19	22.97	1.44	18.34	17.92	19.66

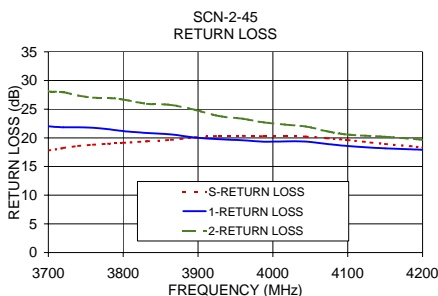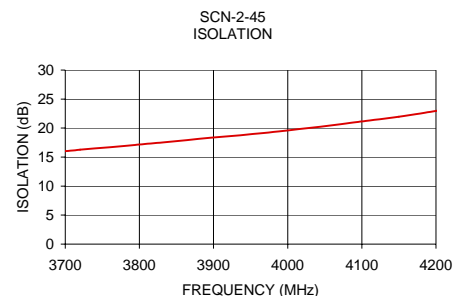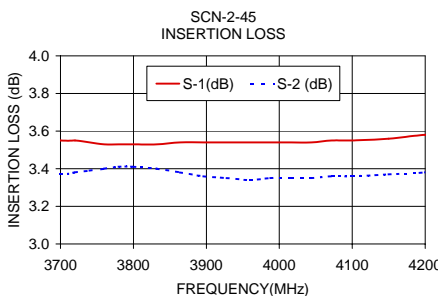

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. B
M102713
SCN-2-45
ED-11378C/2
AD/TD/CP/AM
070810